



Flow control in time-varying, random supply chains



Ion Matei^{a,1}, Assane Gueye^b, John S. Baras^{c,*}

^a Engineering Laboratory, National Institute of Standards and Technology, 100 Bureau Dr., Gaithersburg, MD 20899, United States

^b Information Technology Laboratory, National Institute of Standards and Technology, 100 Bureau Dr., Gaithersburg, MD 20899, United States

^c Institute for Systems Research, University of Maryland College Park, 2247 A.V. Williams Building, MD 20742, United States

ARTICLE INFO

Article history:

Received 13 January 2015

Accepted 13 January 2015

Keywords:

Supply chains

Distributed optimization

Stochastic optimization

Flow management

ABSTRACT

This paper focuses on the logistics aspect of supply chain management. It proposes a randomized flow management algorithm for a time-varying, random, supply chain network. A constrained stochastic optimization problem that maximizes the profit function in terms of the long-run, time-average of the flows in the supply chain is formulated. The algorithm is distributed and based on queueing theory and stochastic Lyapunov analysis concepts. The long-run, time averages of the flows generated by the algorithm can get arbitrarily close to the solution of the aforementioned optimization problem. In support of the theoretical results, numerical simulations are also presented.

© 2015 Elsevier Ltd. All rights reserved.

1. Introduction

Among many possible definitions, the supply chain can be defined as a network of interrelated activities of procurement, production, distribution, vendition, and consumption of one of more products (Zhang et al., 2003). Manufacturing is often outsourced around the world, with each component made in locations chosen for their expertise and low costs (Varkony, 2011). Consequently, today's supply chains are increasingly complex and rely on critical infrastructures such as roads, railways, and airports to move goods (Skulte and Wikerson, 2011), and therefore they exhibit the co-existence of operational optimization with operational vulnerability (Varkony, 2011). This was most recently and dramatically demonstrated in the aftermath of several accidents and natural disasters. For example, a fire in the Phillips Semiconductor plant in Albuquerque, New Mexico caused its major customer, Ericsson, to lose \$400 million in potential revenues. Another example concerns the impact of Hurricane Katrina. This storm halted 10–15% of the total U.S. gasoline production, raising both domestic and overseas oil prices (Canadian Competition Bureau, 2006). More recently, the tragic earthquake of March 13, 2011, off the northeastern coast of Japan and the devastating tsunami that followed have shattered the nation, with immense loss of life and property. In addition, it brought uncertainty of the future, not the least of which is the expected decades-long impact of the nuclear reactors in Fukushima (Varkony, 2011).

As the world's economies become increasingly interconnected into a global economy, supply chain networks face many new types of risk, including natural disasters, political/social instability, cultural/communication inconsistency, exchange rate fluctuation, and local legislations (Behdani, 2011). These risks forced the supply chains' stakeholders to go beyond the operational optimization and to recognize the operational vulnerabilities of the supply chains and to underline their time-varying and random nature.

* Corresponding author. Tel.: +1 301 405 6606.

E-mail addresses: ion.matei@parc.com (I. Matei), assane.gueye@nist.gov (A. Gueye), baras@umd.edu (J.S. Baras).

¹ Current address: Research Scientist in the System Sciences Laboratory, Palo Alto Research Center, CA 94304, USA.

This paper focuses on the *logistics* aspect of the supply chain management. Logistics plans, implements, and controls efficient and effective product storage and flows (forward/reverse). Logistics starts from the point of origin to the point of consumption, with the goal of meeting customer requirements (Blasgen, 2011). The paper addresses the flow management in a supply chain that exhibits stochastic behavior in both links and demands, and in addition it responds to the need for decentralized decisions as point out in (Chopra and Meindl, 2012). A randomized and decentralized algorithm for the management of the flow of the product in a time-varying, random supply chain aimed at maximizing the profit of a firm is proposed. Due to the random nature of the supply chain, the profit function is defined to be dependent on the (long-run, time) averages of the flows, since the flows are random processes. Hence, the optimization problem becomes stochastic. The approach for solving the optimization problem is as follows. First, the satisfiability of the supply chain's constraints is transformed into a stability condition on a set of queues associated with the supply chain's components. Second, a Lyapunov drift analysis technique is used to generate an algorithm that ensures the stability of the queues, and at the same time maximizes the profit function. This approach avoids the need of a realization of the stochastic parameters, as it is the case in a stochastic approximation approach. At each time instant, the algorithm produces decisions on the flows that are implementable (that is, take into account the current state of the supply chain). More importantly, the resulting long-run, time averages of the flows get arbitrarily close to the solution of the stochastic optimization problem. In addition, the algorithm *does not require knowledge of the probability distribution* of the random process that drives the supply chain and deals with both supply changes and demand variability. Furthermore, the *actions taken* by a specific decision maker are based only on a localized view of the state of the supply chain. This localized view consists of the state of all the links that have at one end the decision maker. In other words, *the algorithm is distributed*.

1.1. Related work

Supply chain networks face two types of uncertainties: (1) fluctuations in the demand side and (2) random disruptions in the supply side of the chain. The goal of supply chain management is to mitigate risks due to such uncertainties and efforts in the literature can consequently be classified according to the source(s) of uncertainty they consider.

For a long time, supply chain management research has focused on understanding and mitigating demand uncertainties, which are due to fluctuations both in the amount as well as in the variety of goods needed by the end users (see Lee et al., 1997; Gupta and Maranas, 2003; Hsu and Li, 2011 and the references therein). Fueled by numerous catastrophic events (natural disasters and intentional or unintentional human actions), in the last decade academics and practitioners have become increasingly interested in supply side disruptions (see Snyder et al., 2012, for a detailed literature review of supply chain disruptions). In reality, demand fluctuations and supply side disruptions occur concurrently and there have been a growing number of studies that attempt to simultaneously address both types of uncertainties (Baghalian et al., 2013). The present paper belongs to this category: we consider random demand fluctuations as well as random failures of the network's transportation links.

The mathematical tools used to model and analyze supply chain problems are also diverse and range from linear, non-linear or mixed-integer programming (Aikens, 1985; Vidala and Goetschalck, 2001) to game theory (Nagarajan and Sosis, 2006; Nagurney, 2010; Qiang and Nagurney, 2009; Zhang et al., 2003). Due to the random nature of disruptions in the chain, stochastic models have been largely adopted in the literature (Lewis et al., 2013; Santoso et al., 2005; Lin, 2001; Chou et al., 2003). In this paper, we use a stochastic optimization model and propose a randomized and decentralized algorithm which can get arbitrary close to the optimal solution.

To optimize the supply chain, authors have also focused on different aspects of the chain. In inventory management, which has received a lot of attention (see Pontrandolfo et al., 2002; Qi et al., 2009; Lewis et al., 2013; Snyder et al., 2012, Sec. 6), the main goal "is to find optimal replenishment policy, which indicates *when, from whom, and how much* to order" (Snyder et al., 2012). Another considerable amount of work has been devoted to optimizing facility location (Baghalian et al., 2013; Lim et al., 2013; Snyder et al., 2012, Sec. 7). The goal here is to address the issue of *where* inventory should be stored and distributed. A third category, which has received much less attention, has focused on flow management (Hishamuddin et al., 2013; Unnikrishnan and Figliozzi, 2011). Flow management deals not only with how products are routed, but also, on how much product to send on each transport link. In this paper, we assume that the locations of the facilities are fixed and we are mainly concerned with product storage and flows. We consider a firm that is involved in the production, storage and distribution of a homogeneous products. Although our model may appear to be limited to only supply chains with a vertical integration, our decentralized algorithm can be applied to chains with different business entities, as long as the entities follow the strategies prescribed by the algorithm.

Compared to existing literature, our approach is unique by (1) the sources of uncertainties it considers, (2) the adopted model and the proposed solution method, and (3) the parameters of the chains it optimizes. Nevertheless, our approach intersects and complements several previous studies, while remaining fundamentally different. For instance, (Unnikrishnan and Figliozzi, 2011) proposes a stochastic optimization approach to study supply chain flow management with consideration of disruptions in the transportation links. However, the paper only considers supply side disruptions, while we are interested in both demand and supply side uncertainties. Furthermore, the proposed solution in (Unnikrishnan and Figliozzi, 2011) needs a centralized unit that has full knowledge of the chain. Our algorithm is decentralized and the actions taken by any decision maker depend only on its localized view of the state of the chain.

Reference (Baghalian et al., 2013) is another study that considers both demand fluctuations and supply disruptions. It also proposes a stochastic mathematical formulation for designing a network of multi-product supply chains. However, the paper focuses on investigating the impact of strategic facility location decisions on the operational inventory of the chain. In our study, we assume that facility locations are fixed and we are mostly concerned with product storage and flow.

In (Lin, 2001), the authors propose an algorithm for determining the system reliability with respect to the maximum flow of a network achieving a given demand. Although the network studied by the authors have nodes that can fail randomly, the demand is assumed deterministic and no cost/profit functions are considered in their analysis.

In (Chou et al., 2003), the goal is to determine how much of a particular product a plant should produce, given a (possible random) demand and based on maximizing a utility function. The authors use a simplified model for a supply chain, formed by plants and retailers only, the resulting network topology being a deterministic bipartite graph. The authors propose a heuristic scheme for determining the assignment policy and focus most of their attention to a particular type of graph, called expander graphs. Expander graphs are interesting due to their spectral properties, that is, they do not degrade by increasing the number of nodes. Compared to this work, although the profit function can be interpreted as a utility function, in the current paper the graph is arbitrary and stochastic and the proposed algorithm is based on a rigorous, mathematical analysis.

Another example of supply chain analysis under random demands is introduced in (Dong et al., 2004). Similar to the current paper, the authors focus on determining the flow on the supply chain links based on optimizing an objective function, but the supply chain is assumed deterministic.

Another formulation for the analysis of a supply chain under a stochastic setup is presented in (Santoso et al., 2005), where the authors consider the processing/transportation costs, demands, supplies, and capacities to be stochastic parameters. The goal is to minimize the expectation of a cost function and the authors chose a stochastic approximation strategy to solve the optimization problem. This approach consists of using a realization of the stochastic parameters to approximate the expectation cost and then use deterministic optimization techniques to solve the resulting problem. The main disadvantage of this approach is that the accuracy of the solution depends on the number of samples and the joint probability distribution of the stochastic parameters must be known. In the current paper, the approach for solving the stochastic optimization problem is not based on an approximation of the expected cost and there is no need for the probability distribution to be known.

The paper is organized as following. Section 2 introduces the model for the time-varying supply chain network considered in this paper. Section 3 introduces the notion of the capacity region of a supply chain and formulates a constrained stochastic optimization problem, aimed at maximizing the profit function in terms of the long-run time-average of the flows. Section 4 describes a randomized, dynamic flow control algorithm for solving the stochastic optimization problem, using queuing theory concepts to model the constraints. Section 5 presents a performance analysis of the flow control algorithm, which shows that the solution of the algorithm can get arbitrarily close to the solution of the optimization problem described in Section 3. The paper ends with numerical simulations of the proposed algorithm (Section 6) and some concluding remarks (Section 8).

2. Supply chain model

A firm involved in the production, storage and distribution of a homogeneous product is considered. The firm uses a set of manufacturing facilities, a set of warehouses and serves a set of retail outlets/demand markets.

The supply chain model used in this paper is similar to the one used in (Nagurney, 2010), with the main difference that the network is *time-varying* and *random*. An example of a supply chain network is given in Fig. 1, where node 1 represents the firm, nodes {2, 3, 4} represent the set of manufacturing facilities, nodes {(5, 5'), (6, 6')} are the warehouses and nodes {7, 8, 9} designate the retail outlets/demand markets.

A supply chain with only one firm is considered. The single-firm scenario is suitable for a dominant-firm model, where a single firm controls a dominant share of the market (Samuelson and Marks, 2003). The sets of firms, manufacturers, warehouses and retailers are denoted by $\mathcal{F}$, $\mathcal{M}$, $\mathcal{W}$ and $\mathcal{R}$, respectively. In addition, let $\mathcal{N}$ be the set of all nodes in the network (with a typical node denoted by i), i.e., $\mathcal{N} = \{\mathcal{F} \cup \mathcal{M} \cup \mathcal{W} \cup \mathcal{R}\} \cup \{i' | i \in \mathcal{W}\}$, with cardinality $N = |\mathcal{N}|$. Note that similarly to (Nagurney, 2010), a warehouse i is represented by two nodes in the network (by using i' as well) in order to clearly emphasize the flow of the product passing through the warehouse, i.e., through the link (i, i') . The set of links of the supply chain is denoted by $\mathcal{L} = \{(i, j), i \neq j \in \mathcal{N}\}$, where products “flow” from node i to node j for each $(i, j) \in \mathcal{L}$ and where the flow of the product in the chain is driven by the demand at the retailers/markets. It is assumed that links of the form (i, i') are also included in $\mathcal{L}$.

The supply chain operates in slotted time, with slots normalized to integral units so that slot times occur at times $t \in \{0, 1, 2, \dots\}$. The state of the supply chain at time t is denoted by $S(t)$. The state process $S(t)$ incorporates the stochastic/nondeterministic behavior of the supply chain, such as possible disruptions in manufacturing and transportation due to natural disasters, power outages, technical and malfunctions. For example, the transport or manufacturing capacity can be at full capacity or at zero capacity in case of uncontrollable events. For simplicity, throughout the rest of the paper, we assume that the links of the supply chain can be either active or inactive, as described by $S(t)$. This means that a transportation link may become unavailable at some time slot. The following assumptions about the statistical properties of $S(t)$ are made.

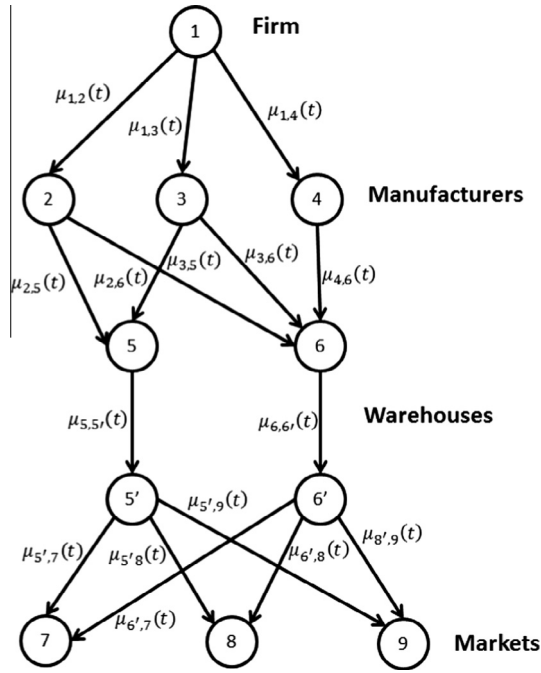


Fig. 1. Example of supply chain network.

Assumption 2.1. The process $S(t)$ belongs to a finite set $\mathcal{S}$ and evolves according to an identically, independently distributed random process, with stationary distribution given by $\pi = (\pi_s)$, where

$$\pi_s = \lim_{t \rightarrow \infty} \frac{1}{t} \sum_{\tau=0}^{t-1} \mathbf{1}_{\{S(\tau)=s\}}, \quad \forall s \in \mathcal{S}, \quad (1)$$

with $\mathbf{1}_{\{S(\tau)=s\}}$ being the indicator function that takes value one whenever $S(t) = s$, and zero otherwise.

The amount of product flowing through the link (i, j) during time slot t is denoted by $\mu_{ij}(t)$. Without loss of generality it is assumed that the flows are measured in (final) product units; to recover other units (raw materials for example) the flows are multiplied by the process rate of the economic unit generating the flow. The random process $d_i(t)$ for $i \in \mathcal{R}$ represents the demand at market i . It is reasonable to assume that the quantity of product flowing between different entities is upper-bounded, and hence the following assumption is made.

Assumption 2.2. The flows $\mu_{ij}(t)$ are non-negative for all time-slots t and there exist positive scalars $\mu_i^{\max}$ such that

$$\sum_b \mu_{i,b}(t) \leq \mu_i^{\max}, \quad \forall i \in \mathcal{N}, \quad \forall t, \quad (2)$$

where all pairs (i, b) belong to the set $\mathcal{L}$.

The above inequalities limit the total flow of the product leaving any node, which can be thought of as production, transportation or storage capabilities limitations.

The following definitions introduce the time averages of the product flows in the supply chain.

Definition 2.1. The time average flows of product in the supply chain are given by

$$\bar{\mu}_{ij}(t) = \frac{1}{t} \sum_{\tau=0}^{t-1} E\{\mu_{ij}(\tau)\}, \quad (3)$$

and the long-run time averages of flow product are given by

$$\bar{\mu}_{ij} = \lim_{t \rightarrow \infty} \bar{\mu}_{ij}(t), \quad (4)$$

for all $(i, j) \in \mathcal{L}$.

Additionally, the market demands satisfy the following assumption.

Assumption 2.3. The random processes $d_i(t)$ are independent and identically distributed, with mean given by

$$\bar{d}_i = E\{d_i(t)\}, \quad \forall i \in \mathcal{R}. \quad (5)$$

The aggregate vectors of product flows and market demands are denoted by $\mu(t) = (\mu_{ij}(t))$ for $(i,j) \in \mathcal{L}$, and $\mathbf{d}(t) = (d_i(t))$ for $i \in \mathcal{R}$, respectively.

3. Formulation of the stochastic optimization problem

In this section, the optimization problem the firm needs to solve to maximize its profit is presented. The profit function is defined as the difference between the revenue from selling the product and the cost for producing the product. Since the supply chain is assumed random, the profit function is defined in terms of the long-run, time averages of the product flows. The flows of the product must satisfy a set of constraints induced by the supply chain network. These constraints define the *capacity region* of a supply chain, which tells how much demand the supply chain can support.

Definition 3.1. The capacity region Λ of a supply chain is the closure of all vector of demands $\mathbf{x} = (x_i)$ that can be supported by the supply chain network, considering all possible strategies for choosing the flows of product, under the limitations introduced by [Assumption 2.2](#).

In the following, a more detailed characterization of the capacity region of a supply chain is given. To that end, let $C_{ij}(s)$ be the set of flows on link (i,j) satisfying [Assumption 2.2](#), when the supply network is in state s , and under all possible flow control policies. Let $\mathbf{C}(s)$ be the set of all link sets, i.e., $\mathbf{C}(s) = (C_{ij}(s))$ for $(i,j) \in \mathcal{L}$. Let $\text{co}\{\mathbf{C}(s)\}$ denote the convex hull of the set of all possible values of $\mathbf{C}(s)$. Recalling that the state of the supply chain is an i.i.d. random process, the set of the average convex hull of all possible flows on links, given all possible states can be defined. This average set can be formally written as a family of graphs Γ , given by

$$\Gamma \triangleq \sum_{s \in \mathcal{S}} \pi_s \text{co}\{\mathbf{C}(s)\}.$$

A matrix $\mathbf{G} = (G_{ij})$ is said to belong to Γ if there exists a randomized flow control policy that depends on the state of the network, such that

$$\mathbf{G} = \sum_{s \in \mathcal{S}} \pi_s E\{\mu(t) | S(t) = s\},$$

where $E\{\mu(t) | S(t) = s\}$ is the expected flow matrix under the considered policy, given that the supply chain is in state s .

The following Theorem inspired by ([Georgiadis et al., 2006](#)) gives a mathematical characterization of the capacity region of the supply chain.

Theorem 3.1. The capacity region of a supply chain is given by the set Λ of all demand vectors $\mathbf{x} = (x_i)$ such that there exists a flow matrix $\mathbf{G} = (G_{ij})$ belonging to the closure of Γ , together with flow variables f_{ij} such that

$$f_{ij} \geq 0, \quad \forall (i,j) \in \mathcal{L}, \quad f_{ij} = 0, \quad \forall (i,j) \notin \mathcal{L}, \quad (6)$$

$$\sum_{a \in \mathcal{F}} f_{a,i} = \sum_{b \in \mathcal{W}} f_{i,b}, \quad \forall i \in \mathcal{M}, \quad (7)$$

$$\sum_{a \in \mathcal{M}} f_{a,i} = f_{i,i'}, \quad \forall i \in \mathcal{W}, \quad (8)$$

$$f_{i,i'} = \sum_{b \in \mathcal{R}} f_{i',b}, \quad \forall i \in \mathcal{W}, \quad (9)$$

$$\sum_{a \in \mathcal{W}} f_{a',i} = x_i, \quad \forall i \in \mathcal{R}, \quad (10)$$

$$f_{ij} \leq G_{ij}, \quad \forall (i,j) \in \mathcal{L}. \quad (11)$$

In the particular case where the process $S(t)$ is i.i.d. (which in fact is the assumption throughout this paper), the next Corollary presents a further characterization of the capacity region, where $\text{Cl}(A)$ is used to denote the closure of the set A .

Corollary 3.1 (adaptation of Corollary 3.9, [Georgiadis et al., 2006](#)). If Γ is a closed set and if the state process $S(t)$ is i.i.d. from slot to slot, the demand vector $\mathbf{x}$ is within the capacity region Λ if and only if there exists a stationary (randomized) policy that chooses $\mu(t)$ based only on the current topology state $S(t)$, such that

$$\begin{aligned}
E\left\{\sum_{a \in \mathcal{F}} \mu_{a,i}(t)\right\} &= E\left\{\sum_{b \in \mathcal{W}} \mu_{i,b}(t)\right\}, \quad \forall i \in \mathcal{M}, \\
E\left\{\sum_{a \in \mathcal{M}} \mu_{a,i}(t)\right\} &= E\left\{\mu_{i,i'}(t)\right\}, \quad \forall i \in \mathcal{W}, \\
E\left\{\mu_{i,i'}(t)\right\} &= E\left\{\sum_{b \in \mathcal{R}} \mu_{i',b}(t)\right\}, \quad \forall i \in \mathcal{W}, \\
E\left\{\sum_{a \in \mathcal{V}} \mu_{a',i}(t)\right\} &= x_i, \quad \forall i \in \mathcal{R},
\end{aligned}$$

where the expectation is taken with respect to the random process $S(t)$ and the (potentially) random policy based on $S(t)$.

Note that if $\mathbf{x} \in \mathcal{A}$, then any $\mathbf{x}^\sim$ such that $\mathbf{x}^\sim \leq \mathbf{x}$ entrywise, also belongs to $\mathcal{A}$. In addition, it can be shown that the set $\mathcal{A}$ is convex, closed and bounded and it contains the vector of all zeros, (i.e., $\mathbf{0} \in \mathcal{A}$).

The previous Corollary gives the constraints induced by the supply chain network that the flows of product must satisfy. Next, a stochastic optimization problem is formulated; problem that describes the objective of the firm under the network constraints introduced above.

The goal of the firm is to maximize its profit, that is the difference between the revenue and the cost functions. The revenue function of the firm depends on the quantity of products that reach the retailers/markets in the long-run. The revenue function is denoted by

$$\mathbf{f}(\bar{\mu}) = \sum_{i \in \mathcal{W}, j \in \mathcal{R}} \mathbf{f}_{i',j}(\bar{\mu}_{i',j}),$$

where (i',j) represent valid warehouse-retailer pairs, i.e., $i \in \mathcal{W}$, $j \in \mathcal{R}$ and $(i',j) \in \mathcal{L}$. Cost functions associated with each link $(i,j) \in \mathcal{L}$ are also considered, and are denoted by $\mathbf{g}_{i,j}(\bar{\mu}_{i,j})$. These cost functions depend on the flow of the product on the links and are generated by activities such as acquiring raw materials, manufacturing, transportation or warehouse usage. The total cost function is given by

$$\mathbf{g}(\bar{\mu}) = \sum_{i \in \mathcal{F}, j \in \mathcal{M}} \mathbf{g}_{i,j}(\bar{\mu}_{i,j}) + \sum_{i \in \mathcal{M}, j \in \mathcal{W}} \mathbf{g}_{i,j}(\bar{\mu}_{i,j}) + \sum_{i \in \mathcal{W}} \mathbf{g}_{i,i'}(\bar{\mu}_{i,i'}) + \sum_{i \in \mathcal{W}, j \in \mathcal{R}} \mathbf{g}_{i',j}(\bar{\mu}_{i',j}).$$

Assumption 3.1. The functions $\mathbf{f}_{i,j}$ are non-negative, continuously differentiable and concave, while the functions $\mathbf{g}_{i,j}$ are non-negative, continuously differentiable and convex.

The profit function $\mathbf{h}$ is the difference between the revenue and the cost functions, i.e.,

$$\mathbf{h}(\bar{\mu}) = \mathbf{f}(\bar{\mu}) - \mathbf{g}(\bar{\mu}).$$

The firm's objective is to maximize the profit under the flow constraints induced by the (capacity region of the) supply chain network. Let x_i denote the long-run average flow of product arriving at market (retailer) i , that is,

$$x_i = \sum_{a \in \mathcal{V}} \bar{\mu}_{a,i}, \quad \forall i \in \mathcal{R}.$$

The following stochastic optimization problem is considered:

$$\begin{aligned}
&\max_{\bar{\mu}, \mathbf{x}} \mathbf{h}(\bar{\mu}), \\
&\text{subject to : } \mathbf{x} \in \mathcal{A}, \\
&\mathbf{x} \leq \bar{\mathbf{d}}.
\end{aligned} \tag{12}$$

The first constraint introduced above ensures that the average product flows arriving at the markets (retailers) are within the capacity region of the supply chain network, i.e., can be supported by the network. The second inequality ensures that the long term flow of the product arriving at the markets are not larger than the demands at the markets.

By Corollary 3.1, the above stochastic optimization problem can be equivalently represented as

$$\begin{aligned}
&\max_{\bar{\mu}} \mathbf{h}(\bar{\mu}) \\
&\text{subject to : } \sum_{a \in \mathcal{F}} \bar{\mu}_{a,i} = \sum_{b \in \mathcal{W}} \bar{\mu}_{i,b}, \quad \forall i \in \mathcal{M}, \\
&\sum_{a \in \mathcal{M}} \bar{\mu}_{a,i} = \bar{\mu}_{i,i'}, \quad \forall i \in \mathcal{W}, \\
&\bar{\mu}_{i',i} = \sum_{b \in \mathcal{R}} \bar{\mu}_{i',b}, \quad \forall i \in \mathcal{W}, \\
&\sum_{a \in \mathcal{V}} \bar{\mu}_{a',i} \leq \bar{d}_i, \quad \forall i \in \mathcal{R},
\end{aligned} \tag{13}$$

where $\bar{\mu}_{ij} = E\{\mu_{ij}(t)\}$ for all $(i,j) \in \mathcal{L}$, with $\mu_{ij}(t)$ being chosen by some stationary, randomized control algorithm, based only on the current state $S(t)$.

Assumption 3.2 (Interior point). There exist positive scalars ε_1 and ε_2 and two stationary randomized flow control policies based on the current state $S(t)$, corresponding to ε_1 and ε_2 , respectively, such that

$$\begin{aligned} E\{\mu_{1,i}^{\varepsilon_1}(t)\} + \varepsilon_1 &= E\left\{\sum_b \mu_{i,b}^{\varepsilon_1}(t)\right\}, \quad \forall i \in \mathcal{M}, \\ \sum_a E\{\mu_{a,i}^{\varepsilon_1}(t)\} + \varepsilon_1 &= E\{\mu_{i,i'}^{\varepsilon_1}(t)\}, \quad \forall i \in \mathcal{W}, \\ E\{\mu_{i,i'}^{\varepsilon_1}(t)\} + \varepsilon_1 &= E\left\{\sum_b \mu_{i',b}^{\varepsilon_1}(t)\right\}, \quad \forall i \in \mathcal{W}, \\ E\left\{\sum_a \mu_{a,i}^{\varepsilon_1}(t)\right\} + \varepsilon_1 &\leq \bar{d}_i, \quad \forall i \in \mathcal{R}, \end{aligned}$$

and

$$\begin{aligned} E\left\{\sum_b \mu_{i,b}^{\varepsilon_2}(t)\right\} + \varepsilon_2 &= E\{\mu_{1,i}^{\varepsilon_2}(t)\}, \quad \forall i \in \mathcal{M}, \\ E\{\mu_{i,i'}^{\varepsilon_2}(t)\} + \varepsilon_2 &= \sum_a E\{\mu_{a,i}^{\varepsilon_2}(t)\}, \quad \forall i \in \mathcal{W}, \\ E\left\{\sum_b \mu_{i',b}^{\varepsilon_2}(t)\right\} + \varepsilon_2 &= E\{\mu_{i,i'}^{\varepsilon_2}(t)\}, \quad \forall i \in \mathcal{W}, \\ E\left\{\sum_a \mu_{a,i}^{\varepsilon_2}(t)\right\} &\leq \bar{d}_i, \quad \forall i \in \mathcal{R}. \end{aligned}$$

The above Assumption basically states that the optimal solution of (13) is not on the boundary of the capacity region. In particular, ε_1 can be viewed as an additional flow on one of the links that arrives at a node and is produced by a source outside the supply chain, while ε_2 can be viewed as an additional flow leaving a node on one of the links but that fails to reach the destination node.

From the numerical optimization point of view, it is more advantageous to work with inequality constraints rather than equality constraints. As a consequence, each equality constraint in (13) is replaced by two inequality constraints, as shown in the following:

$$\begin{aligned} &\max_{\mu} \mathbf{h}(\bar{\mu}) \\ \text{subject to: } &\sum_{a \in \mathcal{F}} \bar{\mu}_{a,i} \leq \sum_{b \in \mathcal{W}} \bar{\mu}_{i,b}, \quad \forall i \in \mathcal{M}, \\ &\sum_{a \in \mathcal{F}} \bar{\mu}_{a,i} \geq \sum_{b \in \mathcal{W}} \bar{\mu}_{i,b}, \quad \forall i \in \mathcal{M}, \\ &\sum_{a \in \mathcal{M}} \bar{\mu}_{a,i} \leq \bar{\mu}_{i,i'}, \quad \forall i \in \mathcal{W}, \\ &\sum_{a \in \mathcal{M}} \bar{\mu}_{a,i} \geq \bar{\mu}_{i,i'}, \quad \forall i \in \mathcal{W}, \\ &\bar{\mu}_{i',i} \leq \sum_{b \in \mathcal{R}} \bar{\mu}_{i',b}, \quad \forall i \in \mathcal{W}, \\ &\bar{\mu}_{i',i} \geq \sum_{b \in \mathcal{R}} \bar{\mu}_{i',b}, \quad \forall i \in \mathcal{W}, \\ &\sum_{a \in \mathcal{W}} \bar{\mu}_{a,i} \leq \bar{d}_i, \quad \forall i \in \mathcal{R}. \end{aligned} \tag{14}$$

In the following sections a mathematical approach for solving the optimization problem (14) is introduced. This approach is based on queueing theory and on drift analysis.

4. Flow control algorithm

In this section a flow control algorithm which ensures that the long-run, time-average flows in the supply chain get arbitrarily close to the optimal solution of (13) is presented. The main idea behind the algorithm is to associate to each of the inequality constraints a (virtual) queue. As shown in what follows, the inequality constraints are satisfied if the queues

associated to them are stable, in some sense that is about to be defined. By taking advantage of this property, an algorithm that stabilizes the queues and gets arbitrarily close to the optimal solution of (14) is proposed. The algorithm is derived as a result of a *drift analysis* approach on the (virtual) queues. This approach is closely related to the stochastic Lyapunov theory (Kushner, 1967) and avoids using a realization of the stochastic parameters for approximating the objective function.

4.1. Modeling inequality constraints using queues

This subsection shows why the feasibility of the inequality constraints defined in the optimization problem (14) can be connected to the stability of a set of queues associated to them.

Consider a queue $U(t)$ (Fig. 2) with (possibly random) input $\lambda(t)$ and output $\mu(t)$, whose dynamics is given by

$$U(t+1) = \max\{U(t) - \mu(t), 0\} + \lambda(t).$$

Definition 4.1. The queue $U(t)$ is said to be strongly stable if

$$\limsup_{t \rightarrow \infty} \frac{1}{t} \sum_{\tau=0}^{t-1} E\{U(\tau)\} < \infty.$$

Let us now assume that there exists $\bar{\lambda}$ and $\bar{\mu}$ such that.

$$\bar{\lambda} = \lim_{t \rightarrow \infty} \frac{1}{t} \sum_{\tau=0}^{t-1} E[\lambda(\tau)], \quad \text{and} \quad \bar{\mu} = \lim_{t \rightarrow \infty} \frac{1}{t} \sum_{\tau=0}^{t-1} E[\mu(\tau)].$$

Proposition 4.1 (Queue stability). A necessary condition for the strong stability of the queue $U(t)$ is

$$\bar{\lambda} \leq \bar{\mu}.$$

The necessary condition is quite intuitive. Indeed, if $\bar{\lambda} > \bar{\mu}$, then the expected queue backlog grows to infinity, leading to instability. Under additional assumptions on the processes $\lambda(t)$ and $\mu(t)$, it can be shown that $\bar{\lambda} < \bar{\mu}$ is also a sufficient condition (see (Georgiadis et al., 2006) for more details).

As previously mentioned, a set of (virtual) queues are associated to the constraints of the optimization problem (14), whose dynamics are given in the following.

In the case of a manufacturing unit, the dynamics of the queue levels are given by

$$U_i^1(t+1) = \max\left\{U_i^1(t) - \sum_b \mu_{i,b}(t), 0\right\} + \sum_a \mu_{a,i}(t), \quad \forall i \in \mathcal{M}, \quad (15)$$

$$U_i^2(t+1) = \max\left\{U_i^2(t) - \sum_a \mu_{a,i}(t), 0\right\} + \sum_b \mu_{i,b}(t), \quad \forall i \in \mathcal{M}. \quad (16)$$

The queues associated to the warehouses evolve in time according to

$$U_i^1(t+1) = \max\left\{U_i^1(t) - \mu_{i,i'}(t), 0\right\} + \sum_a \mu_{a,i}(t), \quad \forall i \in \mathcal{W}, \quad (17)$$

$$U_i^2(t+1) = \max\left\{U_i^2(t) - \sum_a \mu_{a,i}(t), 0\right\} + \mu_{i,i'}(t), \quad \forall i \in \mathcal{W}. \quad (18)$$

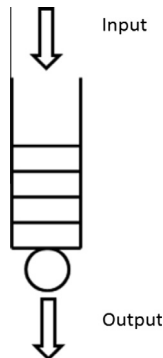


Fig. 2. Queue schematics.

and

$$U_i^1(t+1) = \max \left\{ U_i^1(t) - \sum_b \mu_{i',b}(t), 0 \right\} + \mu_{i,i'}(t), \quad \forall i \in \mathcal{W}, \quad (19)$$

$$U_i^2(t+1) = \max \left\{ U_i^2(t) - \mu_{i,i'}(t), 0 \right\} + \sum_b \mu_{i',b}(t), \quad \forall i \in \mathcal{W}. \quad (20)$$

The dynamics of the queues corresponding to the retailers is given by

$$U_i(t+1) = \max \left\{ U_i(t) - d_i(t), 0 \right\} + \sum_a \mu_{a,i}(t), \quad \forall i \in \mathcal{R}. \quad (21)$$

Remark 4.1. In the previous expressions, $\sum_b \mu_{i,b}(t)$ represents the summation over all active links carrying products from node i , at time slot t , as per the state of the supply chain state $S(t)$. A similar interpretation can be given to the term $\sum_a \mu_{a,i}(t)$.

From Proposition 4.1 it can be inferred that any flow control algorithm stabilizing the queues produces a solution that satisfies the flow constraints defined in the optimization problem (13). Therefore, it makes sense to look for an algorithm that stabilizes the queues defined above and in the same time maximizes the profit function.

4.2. Algorithm description

This section introduces a randomized flow control algorithm that can get arbitrarily close to the optimal solution of (13). The algorithm stabilizes the (virtual) queues and therefore ensures that the inequality constraints are satisfied, but, most importantly, it shows how the economic entities in the supply chain dynamically adapt their flows based on the changes in the network.

The algorithm consists of actions taken by the entities involved in the economic activities of the firm, at each time slot t . Let δ be a positive scalar, that affects the performance of the algorithm. For simplicity, the set of firms $\mathcal{F}$ contains only one firm, say node 1 in the network. In the following the flow control algorithm is described.

- **Control of the raw material flow:** At every time slot, the firm observes the current levels of the manufacturers' queues, $U_b^1(t)$ and $U_b^2(t)$. Then, at each time t it chooses the amount $\mu_{1,b}$ of raw material sent to manufacturer b , where $\mu_{1,b}$ is the solution of the following optimization problem:

$$\min_{\mu_{1,b}} \sum_{b \in \mathcal{M}} \left(\delta \mathbf{g}_{1,b}(\mu_{1,b}) + \left[U_b^1(t) - U_b^2(t) \right] \mu_{1,b} \right) \quad (22)$$

$$\text{subject to: } \sum_{b \in \mathcal{M}} \mu_{1,b} \leq \mu_1^{\max}, \quad \mu_{1,b} \geq 0, \quad \forall b. \quad (23)$$

- **Control of the flow of product from manufacturers to warehouses:** At every time slot, each manufacturer i observes the current level of its queues $U_i^1(t)$ and $U_i^2(t)$ and the current levels of the queues of the warehouse b to which product is possible to be sent to (as per the state of $S(t)$), i.e., $U_b^1(t)$ and $U_b^2(t)$. The amount of product sent to each warehouse b at time slot t is given by $\mu_{i,b}$, obtained as solution of the following optimization problem:

$$\min_{\mu_{i,b}} \sum_b \delta \mathbf{g}_{i,b}(\mu_{i,b}) - \left(\left[U_i^1(t) - U_b^1(t) \right] + \left[U_b^2(t) - U_i^2(t) \right] \right) \mu_{i,b} \quad (24)$$

$$\text{subject to: } \sum_{b \in \mathcal{W}} \mu_{i,b} \leq \mu_i^{\max}, \quad \mu_{i,b} \geq 0, \quad \forall b, \quad (25)$$

for all $i \in \mathcal{M}$, $b \in \mathcal{W}$ and $(i, b) \in \mathcal{L}$ which are active at time t , as per the state of the supply chain given by $S(t)$.

- **Control of the flow of product within the warehouses:** At every time slot, each warehouse i observes the current level of its queues $U_i^1(t)$, $U_i^1(t)$, $U_i^2(t)$ and $U_i^2(t)$. The amount of product allowed in the warehouse at time slot t is given by $\mu_{i,i'}$, obtained as solution of the following optimization problem:

$$\min_{\mu} \delta \mathbf{g}_{i,i'}(\mu) - \left(\left[U_i^1(t) - U_{i'}^1(t) \right] + \left[U_{i'}^2(t) - U_i^2(t) \right] \right) \mu \quad (26)$$

$$\text{subject to: } 0 \leq \mu \leq \mu_i^{\max} \quad (27)$$

for all $i \in \mathcal{W}$ and $(i, i') \in \mathcal{L}$ which are active at time t , as per the state of the supply chain given by $S(t)$.

- **Control of the flow of product from warehouses to retailers:** At every time slot, each warehouse i observes the current level of its queues backlog $U_i^1(t)$ and $U_i^2(t)$ and the current level of the queue of the retailer b to which the product is sent to, i.e., $U_b^1(t)$. The amount of product sent to retailer b at time slot t is given by $\mu_{i',b}$, where $\mu_{i',b}$ are obtained as solution of the following optimization problem:

$$\min_{\mu_{i',b}} \sum_{b \in \mathcal{R}} \delta \mathbf{g}_{i',b}(\mu_{i',b}) - \delta \mathbf{f}_{i',b}(\mu_{i',b}) - \left[\left(U_{i'}^1(t) - U_b^1(t) \right) - U_{i'}^2(t) \right] \mu_{i',b} \quad (28)$$

$$\text{subject to: } \sum_{b \in \mathcal{R}} \mu_{i',b} \leq \mu_{i'}^{\max}, \quad \mu_{i',b} \geq 0, \quad \forall b, \quad (29)$$

for all $i \in \mathcal{W}$, $b \in \mathcal{R}$ and $(i', b) \in \mathcal{L}$ which are active at time t , as per the state of the supply chain given by $S(t)$.

Note that the optimization problems (22)–(28) are convex constrained optimization problems, which can be solved efficiently at each time slot. Also, note that each of the entities involved in the economic activities *does not need to know the entire state of the network, nor the probability distribution of $S(t)$* . Indeed, in the case of the manufacturers, the raw material flow is determined only by the level of the queues' backlogs and the cost. When a manufacturer must decide the flow of the product sent to warehouses, it looks at the current valid links, and it makes the decision based on the cost of utilizing the respective links, and based on the difference between the queues' levels of the manufacturer and warehouses. In the case of the amount of product allowed in a warehouse, the decision is based on the cost of keeping the product in the warehouse and on the difference between the levels of the (virtual) queues. Finally, the amount of product sent to retailers from a warehouse is based on the current available links, on the (localized) profit obtained from sending products to a specific retailer and on the difference between the queues' levels of the warehouse and retailers. *This limited need of information for implementing the algorithm makes it advantageous for controlling the flow of product in increasingly complex and globalized supply chains.* Another important observation is that the manufacturers, warehouses and retailers do not need to know the entire state of the network at a time slot, nor the statistics of the state process $S(t)$. They only need to observe the state of links which connect them to their neighbors. In addition, the virtual queues $U_i^1(t)$ can find an analogy in reality. Indeed, in the case of a manufacturer for example, the queue can be viewed as a deposit for the raw material waiting to be processed.

5. Derivation of the algorithm and performance analysis

This section shows the considerations behind the development of the algorithm and analyzes its performance. The algorithm is derived as a result of a tradeoff between maximizing the profit function and maintaining the stability of the queues introduced above. Stability of the queues ensures that the constraints introduced by the supply chain are satisfied. By putting more weight on maximizing the profit function, the flows generated by the algorithm get closer to the optimal solution. However, the backlogs of the queues are increased as well.

5.1. Derivation of the algorithm

The algorithm is derived as a result of a tradeoff between a drift function and the profit function. The drift is a measure of the increase in the queues' backlogs.

Let $\mathbf{U}(t) = (U_i^j(t), i \in \mathcal{M}, U_i^j(t), U_i^j(t), i \in \mathcal{W}, j \in \{1, 2\}, U_i(t), i \in \mathcal{R})$ be the vector of queues. Using the quadratic Lyapunov function

$$V(\mathbf{U}(t)) \triangleq \frac{1}{2} \sum_{j \in \{1, 2\}} \left[\sum_{i \in \mathcal{M}} U_i^j(t)^2 + \sum_{i \in \mathcal{W}} (U_i^j(t)^2 + U_i^j(t)^2) \right] + \frac{1}{2} \sum_{i \in \mathcal{R}} U_i(t)^2,$$

the queues' drift is given by:

$$\Delta(\mathbf{U}(t)) \triangleq E[V(\mathbf{U}(t+1)) - V(\mathbf{U}(t)) | \mathbf{U}(t)],$$

The flow control algorithm for the supply chain results from minimizing an upper bound of the following quantity

$$\Delta(\mathbf{U}(t)) - \delta E\{\mathbf{h}(\mu(t)) | \mathbf{U}(t)\}, \quad (30)$$

for each time slot t . Note that minimizing the previous expression means a trade-off between the stability of the queues through the Lyapunov drift $\Delta(\mathbf{U}(t))$ and the firm's profit through the profit function $\mathbf{h}$, where δ is a weighing factor. In fact, making δ large enough implies focusing on maximizing the profit (and getting arbitrarily close to the optimal solution), but at a cost in terms of an increased product congestion in the queues.

Let Y , U , μ , A be non-negative reals so that

$$Y \leq \max\{U - \mu, 0\} + A.$$

It is not difficult to show that the following inequality holds:

$$Y^2 \leq U^2 + \mu^2 + A^2 - 2U(\mu - A). \quad (31)$$

Using the previous inequality, an upper-bound for (30) is as follows:

$$\begin{aligned}
\Delta(\mathbf{U}(t)) - \delta E\{\mathbf{h}(\mu(t))|\mathbf{U}(t)\} &\leq B\bar{N} - E\left\{\sum_{i \in \mathcal{M}} U_i^1(t) \left(\sum_b \mu_{i,b}(t) - \mu_{1,i}(t)\right) |\mathbf{U}(t)\right\} - E\left\{\sum_{i \in \mathcal{M}} U_i^2(t) \left(-\sum_b \mu_{i,b}(t) + \mu_{1,i}(t)\right) |\mathbf{U}(t)\right\} \\
&- E\left\{\sum_{i \in \mathcal{W}} U_i^1(t) \left(\mu_{i,i'}(t) - \sum_a \mu_{a,i}(t)\right) |\mathbf{U}(t)\right\} - E\left\{\sum_{i \in \mathcal{W}} U_i^2(t) \left(-\mu_{i,i'}(t) + \sum_a \mu_{a,i}(t)\right) |\mathbf{U}(t)\right\} \\
&- E\left\{\sum_{i \in \mathcal{W}} U_i^1(t) \left(\sum_b \mu_{i,b}(t) - \mu_{i,i'}(t)\right) |\mathbf{U}(t)\right\} - E\left\{\sum_{i \in \mathcal{W}} U_i^2(t) \left(-\sum_b \mu_{i,b}(t) + \mu_{i,i'}(t)\right) |\mathbf{U}(t)\right\} \\
&- E\left\{\sum_{i \in \mathcal{R}} U_i(t) \left(d_i(t) - \sum_a \mu_{a,i}(t)\right) |\mathbf{U}(t)\right\} - \delta E\left\{\sum_{(i',j)} \mathbf{f}_{i',j}(\mu_{i',j}(t)) |\mathbf{U}(t)\right\} \\
&+ \delta E\left\{\sum_{i \in \mathcal{M}} \mathbf{g}_i(r_i(t)) |\mathbf{U}(t)\right\} + \delta E\left\{\sum_{(i,j)} \mathbf{g}_{i,j}(\mu_{i,j}(t)) |\mathbf{U}(t)\right\} + \delta E\left\{\sum_{(i,i')} \mathbf{g}_{i,i'}(\mu_{i,i'}(t)) |\mathbf{U}(t)\right\} \\
&+ \delta E\left\{\sum_{(i',j)} \mathbf{g}_{i',j}(\mu_{i',j}(t)) |\mathbf{U}(t)\right\},
\end{aligned}$$

where

$$B \triangleq \frac{1}{\bar{N}} \sum_{i \in \mathcal{N}} 2(\mu_i^{\max})^2,$$

and where $\bar{N}$ is the number of all queues.

A rearrangement of the sums in the previous inequality further produces

$$\begin{aligned}
\Delta(\mathbf{U}(t)) - \delta E\{\mathbf{h}(\mu(t))|\mathbf{U}(t)\} &\leq BN + E\left\{\sum_{i \in \mathcal{R}} U_i(t) d_i(t) |\mathbf{U}(t)\right\} + E\left\{\sum_{i \in \mathcal{M}} \delta \mathbf{g}_{1,i}(\mu_{1,i}(t)) + [U_i^1(t) - U_i^2(t)] \mu_{1,i}(t) |\mathbf{U}(t)\right\} \\
&+ E\left\{\sum_{(i,b), i \in \mathcal{M}, b \in \mathcal{W}} \delta \mathbf{g}_{i,b}(\mu_{i,b}(t)) - ([U_i^1(t) - U_b^1(t)] + [U_b^2(t) - U_i^2(t)]) \mu_{i,b}(t) |\mathbf{U}(t)\right\} \\
&+ E\left\{\sum_{(i \in \mathcal{W})} \delta \mathbf{g}_{i,i'}(\mu_{i,i'}(t)) - ([U_i^1(t) - U_{i'}^1(t)] + [U_{i'}^2(t) - U_i^2(t)]) \mu_{i,i'}(t) |\mathbf{U}(t)\right\} \\
&+ E\left\{\sum_{(i',b), i' \in \mathcal{W}, b \in \mathcal{R}} \delta \mathbf{g}_{i',b}(\mu_{i',b}(t)) - \delta \mathbf{f}_{i',b}(\mu_{i',b}(t)) - [U_{i'}^1(t) - U_b(t) - U_{i'}^2(t)] \mu_{i',b}(t) |\mathbf{U}(t)\right\}.
\end{aligned} \tag{32}$$

From the above inequality, the derivation of the algorithm is evident. Given queue levels $\mathbf{U}(t)$, the flow control algorithm follows from greedily minimizing the right-hand side of the inequality (32), in terms of the control variables $\mu(t)$ over all possible flow options satisfying the constraints introduced in [Assumption 2.2](#).

5.2. Performance analysis

This subsection shows that the dynamic flow control algorithm introduced above gets arbitrarily close to the optimal solution of (14). The next theorem proves to be useful in the analysis of the algorithm.

Theorem 5.1. Let [Assumptions 2.1, 2.2, 2.3, 3.1, 3.2](#) hold and assume that there exist positive constants δ , ε and B such that for all timeslots t and all backlog queue levels $\mathbf{U}(t)$, the Lyapunov drift satisfies:

$$\Delta(\mathbf{U}(t)) - \delta E\{\mathbf{h}(\mu(t))|\mathbf{U}(t)\} \leq B - \varepsilon \sum_{i=1}^{\bar{N}} U_i(t) - \delta \mathbf{h}^*, \tag{33}$$

where $\mathbf{h}^*$ is the optimal cost function of the stochastic optimization problem (13). Then the following inequalities are satisfied

$$\limsup_{t \rightarrow \infty} \frac{1}{t} \sum_{\tau=0}^{t-1} \left[\sum_{j=1}^2 \left(\sum_{i \in \mathcal{W}} E\{U_i^j(\tau)\} + \sum_{i \in \mathcal{M}} E\{U_i^j(\tau) + U_{i'}^j(\tau)\} + \sum_{i \in \mathcal{R}} E\{U_i(\tau)\} \right) \right] \leq \frac{B + \delta(\bar{h} - \mathbf{h}^*)}{\varepsilon} \tag{34}$$

$$\liminf_{t \rightarrow \infty} \mathbf{h}(\bar{\mu}(t)) \geq \mathbf{h}^* - \frac{B}{\delta}, \tag{35}$$

where $\bar{\mu}(t)$ was defined in (3) and $\bar{\mathbf{h}}$ is given by

$$\bar{\mathbf{h}} \triangleq \limsup_{t \rightarrow \infty} \frac{1}{t} \sum_{\tau=0}^{t-1} E\{\mathbf{h}(\mu(\tau))\}.$$

The previous Theorem is a slight modification of Theorem 5.4 in (Georgiadis et al., 2006) and for brevity the proof is omitted.

Remark 5.1. Note that since the flows $\mu_{ij}(t)$ are upper bounded by $\mu_i^{\max}$ and the function $\mathbf{h}$ is continuous, there exists $h_{\max}$ so that $\bar{\mathbf{h}} - \mathbf{h}^* \leq \mathbf{h}_{\max}$. In addition, let $\mu_{\max} \triangleq \min\{\mu_i^{\max}\}$.

The next Theorem describes the performance of the flow control algorithm.

Theorem 5.2. Let Assumptions 2.1, 2.2, 2.3, 3.1, 3.2 hold. For any positive parameter δ the flow control algorithm stabilizes the (virtual) queues associated with the constraints of the optimization problem (14) and gives the following upper bounds:

$$\limsup_{t \rightarrow \infty} \frac{1}{t} \sum_{\tau=0}^{t-1} \left(\sum_{j=1}^2 \sum_{i \in \mathcal{V}} E\{U_i^j(\tau)\} + \sum_{i \in \mathcal{M}} E\{U_i^j(\tau) + U_i^j(\tau)\} + \sum_{i \in \mathcal{R}} E\{U_i(\tau)\} \right) \leq \frac{NB + \delta \mathbf{h}_{\max}}{\mu_{\max}} \quad (36)$$

$$\liminf_{t \rightarrow \infty} \mathbf{h}(\bar{\mu}(t)) \geq \mathbf{h}(\mu^*) - \frac{BN}{\delta}, \quad (37)$$

where μ^* is the solution of (13) and where $\bar{\mu}(t)$ satisfies (3).

Let ε_1 be a small quantity of product flow added to the inputs of queues $U_i^1(t)$ for all $i \in \mathcal{M} \cup \mathcal{W}$ and queues $U_i(t)$, for $i \in \mathcal{R}$. It follows that the dynamics of the aforementioned queues become

$$\begin{aligned} U_i^1(t+1) &= \max \left\{ U_i^1(t) - \sum_b \mu_{i,b}(t), 0 \right\} + \mu_{1,i}(t) + \varepsilon_1, \quad \forall i \in \mathcal{M}, \\ U_i^1(t+1) &= \max \left\{ U_i^1(t) - \mu_{i,i'}(t), 0 \right\} + \sum_a \mu_{a,i}(t) + \varepsilon_1, \quad \forall i \in \mathcal{W}, \\ U_{i'}^1(t+1) &= \max \left\{ U_{i'}^1(t) - \sum_b \mu_{i',b}(t), 0 \right\} + \mu_{i,i'}(t) + \varepsilon_1, \quad \forall i \in \mathcal{W}, \\ U_i(t+1) &= \max \{ U_i(t) - d_i(t), 0 \} + \sum_a \mu_{a',i}(t) + \varepsilon_1, \quad \forall i \in \mathcal{R}, \end{aligned}$$

and let $\mathcal{A}_{\varepsilon_1}$ denote the capacity region of the supply chain under the additional flow ε_1 , and $\bar{\mu}^*(\varepsilon_1)$ denote the solution of (13), when $\mathcal{A}$ is replaced by $\mathcal{A}_{\varepsilon_1}$. Then, by Corollary 3.1 applied to the capacity region $\mathcal{A}_{\varepsilon_1}$, we have that there exists a stationary randomized flow control algorithm, that chooses the flows based on the current state of the supply chain, and gives

$$\begin{aligned} E\{\mu_{1,i}^*(\varepsilon_1)\} + \varepsilon_1 &= E\left\{ \sum_b \mu_{i,b}^*(\varepsilon_1) \right\}, \quad \forall i \in \mathcal{M}, \\ \sum_a E\{\mu_{a,i}^*(\varepsilon_1)\} + \varepsilon_1 &= E\{\mu_{i,i'}^*(\varepsilon_1)\}, \quad \forall i \in \mathcal{W}, \\ E\{\mu_{i,i'}^*(\varepsilon_1)\} + \varepsilon_1 &= E\left\{ \sum_b \mu_{i',b}^*(\varepsilon_1) \right\}, \quad \forall i \in \mathcal{W}, \\ E\left\{ \sum_a \mu_{a',i}^*(\varepsilon_1) \right\} + \varepsilon_1 &\leq \bar{d}_i, \quad \forall i \in \mathcal{R}, \end{aligned}$$

where $\bar{\mu}_{ij}^*(\varepsilon_1) = E\{\mu_{ij}^*(\varepsilon_1)\}$.

Similarly, assuming that a small flow ε_2 is added to the inputs of queues $U_i(t)^2$, their dynamics become

$$\begin{aligned} U_i^2(t+1) &= \max \left\{ U_i^2(t) - \mu_{1,i}(t), 0 \right\} + \sum_b \mu_{i,b}(t) + \varepsilon_2, \quad \forall i \in \mathcal{M}, \\ U_i^2(t+1) &= \max \left\{ U_i^2(t) - \sum_a \mu_{a,i}(t), 0 \right\} + \mu_{i,i'}(t) + \varepsilon_2, \quad \forall i \in \mathcal{W}, \\ U_{i'}^2(t+1) &= \max \left\{ U_{i'}^2(t) - \mu_{i,i'}(t), 0 \right\} + \sum_b \mu_{i',b}(t) + \varepsilon_2, \quad \forall i \in \mathcal{W}. \end{aligned}$$

Denoting by $\mathcal{A}_{\varepsilon_2}$ the capacity region under the additional flow ε_2 , $\bar{\mu}^*(\varepsilon_2)$ represents the solution of (13) when $\mathcal{A}$ is replaced by $\mathcal{A}_{\varepsilon_2}$.

As before, by [Corollary 3.1](#) applied to the capacity region A_{e_2} , there exists a stationary randomized flow control algorithm, that chooses the flows based on the current state of the supply chain, and gives

$$\begin{aligned} E\left\{\sum_b \mu_{i,b}^*(\varepsilon_2)\right\} + \varepsilon_2 &= E\{\mu_{1,i}^*(\varepsilon_2)\}, \quad \forall i \in \mathcal{M}, \\ E\left\{\mu_{i,i'}^*(\varepsilon_2)\right\} + \varepsilon_2 &= \sum_a E\left\{\mu_{a,i}^*(\varepsilon_2)\right\}, \quad \forall i \in \mathcal{W}, \\ E\left\{\sum_b \mu_{i',b}^*(\varepsilon_2)\right\} + \varepsilon_2 &= E\left\{\mu_{i,i'}^*(\varepsilon_2)\right\}, \quad \forall i \in \mathcal{W}, \end{aligned}$$

where $\bar{\mu}_{ij}^*(\varepsilon_2) = E\{\mu_{ij}^*(\varepsilon_2)\}$. Note that by [Assumption 3.2](#), such ε_1 and ε_2 do exist.

The flow control algorithm described in the previous section minimizes the right-hand side of inequality (32) for all possible policies based on the current state of the supply chain. In particular, it does this against the previously mentioned stationary policies, generated by adding the additional flows ε_1 and ε_2 . Consequently, under the flow control algorithm, it follows that

$$\begin{aligned} \Delta(\mathbf{U}(t)) - \delta E\{\mathbf{h}(\mu(t))|\mathbf{U}(t)\} &\leq B\bar{N} - \sum_{i \in \mathcal{M}} U_i^1(t) \left(\sum_b \bar{\mu}_{i,b}^*(\varepsilon_1) - \bar{\mu}_{1,i}^*(\varepsilon_1) \right) - \sum_{i \in \mathcal{M}} U_i^2(t) \left(-\sum_b \bar{\mu}_{i,b}^*(\varepsilon_2) + \bar{\mu}_{1,i}^*(\varepsilon_2) \right) \\ &\quad - \sum_{i \in \mathcal{W}} U_i^1(t) \left(\bar{\mu}_{i,i'}^*(\varepsilon_1) - \sum_a \bar{\mu}_{a,i}^*(\varepsilon_1) \right) - \sum_{i \in \mathcal{W}} U_i^2(t) \left(-\bar{\mu}_{i,i'}^*(\varepsilon_2) + \sum_a \bar{\mu}_{a,i}^*(\varepsilon_2) \right) \\ &\quad - \sum_{i \in \mathcal{W}} U_i^1(t) \left(\sum_b \bar{\mu}_{i,b}^*(\varepsilon_1) - \bar{\mu}_{i,i'}^*(\varepsilon_1) \right) - \sum_{i \in \mathcal{W}} U_i^2(t) \left(-\sum_b \bar{\mu}_{i,b}^*(\varepsilon_2) + \bar{\mu}_{i,i'}^*(\varepsilon_2) \right) \\ &\quad - \sum_{i \in \mathcal{R}} U_i(t) \left(E\{d_i(t)\} - \sum_a \bar{\mu}_{a,i}^*(\varepsilon_1) \right) - \delta \sum_{(i',j)} \mathbf{f}_{i',j}(\bar{\mu}_{i',j}^*(\varepsilon_1)) + \delta \sum_{i \in \mathcal{M}} \mathbf{g}_{1,i}(\bar{\mu}_{1,i}^*(\varepsilon_1)) \\ &\quad + \delta \sum_{(i,j)} \mathbf{g}_{i,j}(\bar{\mu}_{i,j}^*(\varepsilon_1)) + \delta \sum_{(i,i')} \mathbf{g}_{i,i'}(\bar{\mu}_{i,i'}^*(\varepsilon_1)) + \delta \sum_{(i',j)} \mathbf{g}_{i',j}(\bar{\mu}_{i',j}^*(\varepsilon_1)). \end{aligned}$$

Denoting $\varepsilon = \min\{\varepsilon_1, \varepsilon_2\}$, the above inequality becomes

$$\Delta(\mathbf{U}(t)) - \delta E\{\mathbf{h}(\mu(t))|\mathbf{U}(t)\} \leq B\bar{N} - \varepsilon \sum_{j=1}^2 \sum_{i \in \mathcal{M}} U_i^j(t) - \varepsilon \sum_{j=1}^2 \sum_{i \in \mathcal{W}} [U_i^j(t) + U_{i'}^j(t)] - \varepsilon \sum_{i \in \mathcal{R}} U_i(t) - \delta \mathbf{h}(\bar{\mu}^*(\varepsilon_1)).$$

By [Theorem 5.1](#) it follows that

$$\begin{aligned} \limsup_{t \rightarrow \infty} \frac{1}{t} \sum_{\tau=0}^{t-1} \left[\sum_{i \in \mathcal{W}} \left(\sum_{j=1}^2 E\{U_i^j(\tau)\} + \sum_{i \in \mathcal{M}} E\{U_i^j(\tau) + U_{i'}^j(\tau)\} + \sum_{i \in \mathcal{R}} E\{U_i(\tau)\} \right) \right] &\leq \\ \frac{BN + \delta(\bar{\mathbf{h}} - \mathbf{h}(\mu^*(\varepsilon_1)))}{\varepsilon} &\leq \frac{BN + \delta \mathbf{h}_{\max}}{\varepsilon} \end{aligned} \quad (38)$$

and

$$\liminf_{t \rightarrow \infty} \mathbf{h}(\mu(t)) \geq \mathbf{h}(\mu^*(\varepsilon_1)) - \frac{BN}{\delta}. \quad (39)$$

The performance bounds in (38) and (39) hold for any values of ε_i such that $0 < \varepsilon_i \leq \mu_{\max}$, for $i = 1, 2$. However, the particular values of ε_i only affect the values of the bounds and not the control algorithm. Therefore, the bounds can be optimized separately over all possible values of ε_i , $i = 1, 2$. Obviously, the bound (38) is minimized when ε approaches $\mu_{\max}$. It can be shown that the optimal solution of (13) when the capacity region is replaced by A_{e_1} , is continuous in ε_1 . Consequently, as ε_1 approaches zero, the capacity region A_{e_1} approaches $\mathcal{A}$ and $\mu^*(\varepsilon_1)$ approaches μ^* . Therefore, the bound (39) is minimized when ε_1 goes to zero, and the result follows.

Remark 5.2. Note that inequality (36) shows that under the flow control algorithm, the queues remain stable, i.e., the long-run flows are feasible. In addition, inequality (37) shows that the solution provided by the flow control algorithm can get arbitrarily close to the optimal solution, by making δ arbitrarily large.

6. Numerical example

The flow control algorithm described in the previous sections was implemented and tested on the supply chain network shown in Fig. 1. The cost function corresponding to each link (i, j) of the network has the form $g_{ij}(\mu_{ij}) = a_{ij}\mu_{ij}^2 + b_{ij}\mu_{ij}$, while the revenue function is given by $f(\mu) = c\mu^{\frac{1}{p}} + d$, where $a_{ij} = 0.1$, $b_{ij} = 0.3$, $c = 3$, $d = 2$, $p = 1.8$. The maximum output rate at node i is assumed to be equal to $\mu_{\max} = 6 \times L_i$, where L_i is the number of links going out of i . This sets an “average” maximum rate of 6 for each link. A link has two states, ON and OFF, and the links ON–OFF processes are assumed to be i.i.d. with an ‘ON’ probability of 0.9. The demand processes are taken to be independent and uniformly distributed between 0 and 3 at each time, with an average of 1.5. In addition, two values for the parameter δ are considered, 0.1 and 0.9, respectively, to show its influence on the queues’ backlog.

The queues’ backlog over time as well as the running averages of the queues (Fig. 5) for the two considered values of δ are plotted. Both the plots for the forward $U_i^{(1)}$ and backward $U_i^{(2)}$ queues are shown. Recall that these queues are virtual queues introduced as a consequence of modeling the inequality constraints as queues. However, the forward queues can be interpreted as real queues at nodes of the network. Also, notice that there is no backward queue defined for the queue at a retailer. The queues’ backlogs of each branch are shown in a 4-by-2 panel where the left column corresponds to the forward queues (from top to bottom nodes) and the right column corresponds to the backward queues.

Plots of the flow rates on the different links and their running averages (Fig. 6) are also depicted. The link flow rates are shown in a 2-column panel. The left column shows links (originating) in the left branch and the right column displays the rates of links (originating) in the right branch. In Fig. 5, the left column shows (from top to bottom) the rates in links L_1 , L_3 , L_5 , L_7 of the topology on Fig. 3; the right column shows the rate at links L_2 , L_4 , L_6 , L_8 . The cross-branch links are shown in the bottom subplots (the rates at links L_9 , L_{11} are shown in the bottom of the left column and links L_{10} , L_{12} ’s rates in the bottom of the right column). Finally, to emphasize on the convergence of the average rates, a zoom-in of the rate plots is presented to focus only on the $[0, 1.8]$ -range of the y-axis (i.e., the rates). This is shown in Fig. 7.

6.1. Discussion: Queues’ backlog

The queues’ backlogs are shown in Figs. 4–7. It can be observed that the queues are oscillating but are not growing unbounded. This is exactly the stability of queues predicted by the theory. In fact, the average rates also satisfies the stability condition of Proposition 4.1, as well. The theory however, does not predict anything about the convergence of the average queues’ backlog. Yet, it can be observed that the average backlog seems to converge for all (forward and backward) queues. An interesting follow up of this study is to prove/disprove convergence of average queue and to determine under which conditions convergence is guaranteed.

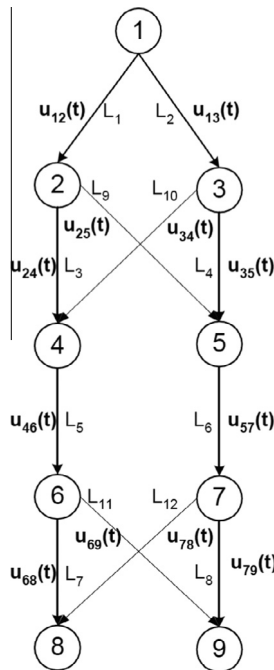


Fig. 3. Example of network topology: 2 branches, 2 retailers, up and downstream crossings.

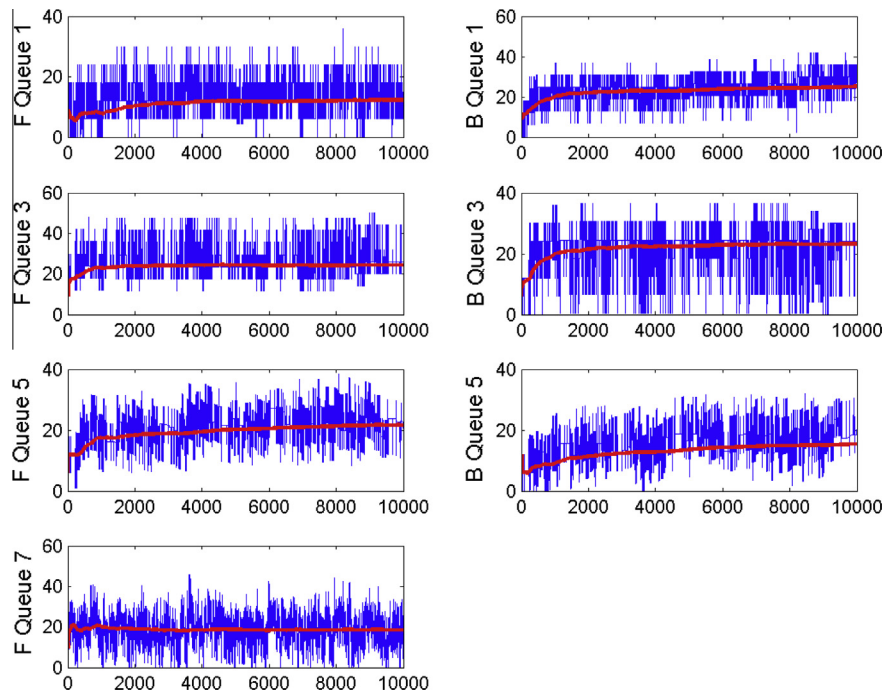


Fig. 4. Queues levels; Branch 1 for $\delta = 0.1$.

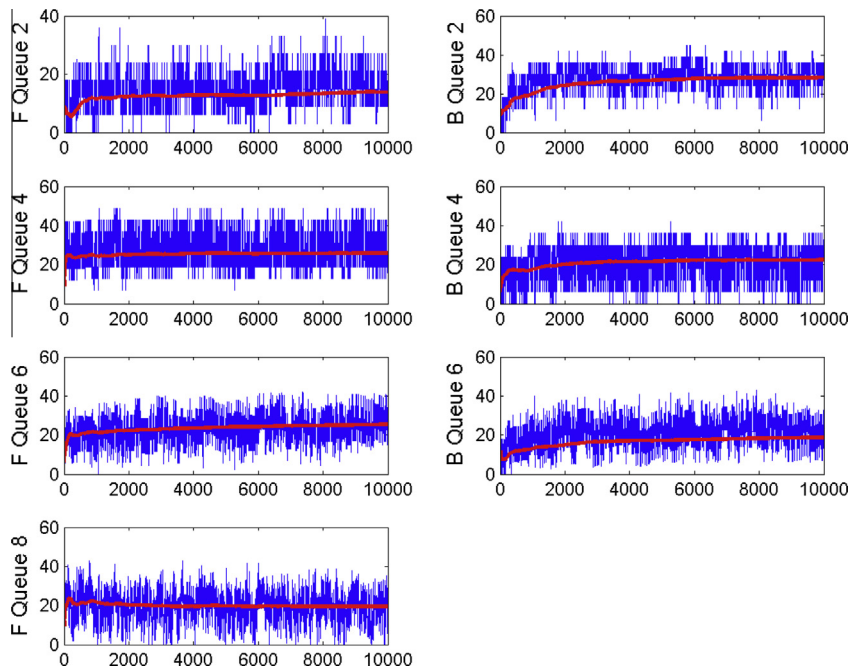


Fig. 5. Queues levels; Branch 2 for $\delta = 0.1$.

From the figures, it can be noticed that in general, the forward queues at the manufacturers and at the first (upper) warehouses are in average more loaded than the queues at the second (lower) warehouses and at the retailers. This is a consequence of the back-pressure algorithm, which forces upstream nodes to reduce their rate and consequently build up their queues when downstream nodes are congested. Hence, in general, queues close to the destination tend to have a smaller backlog. It can be also observed that the cross links serve to balance the load to reduce the variations in each queue.

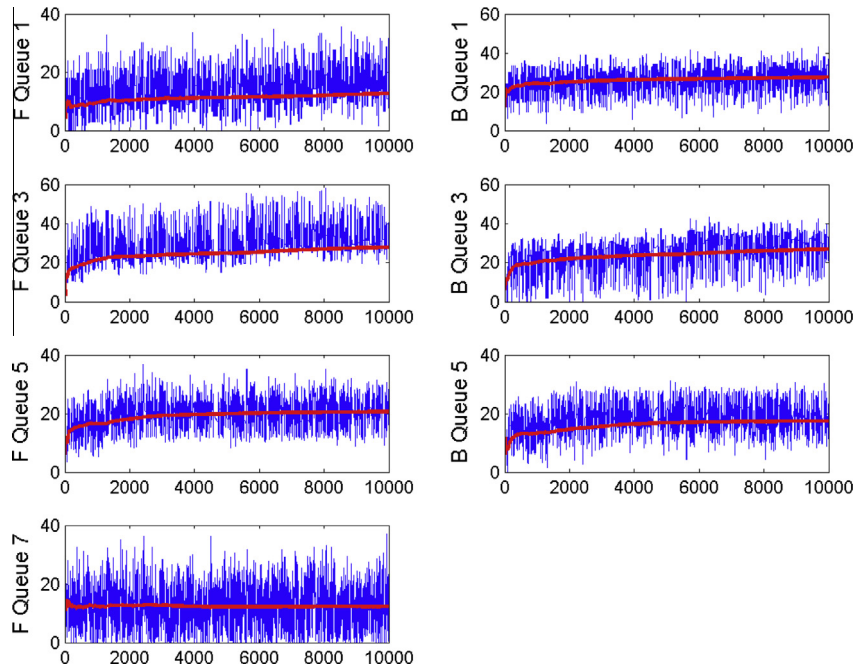


Fig. 6. Queues levels; Branch 1 for $\delta = 0.9$.

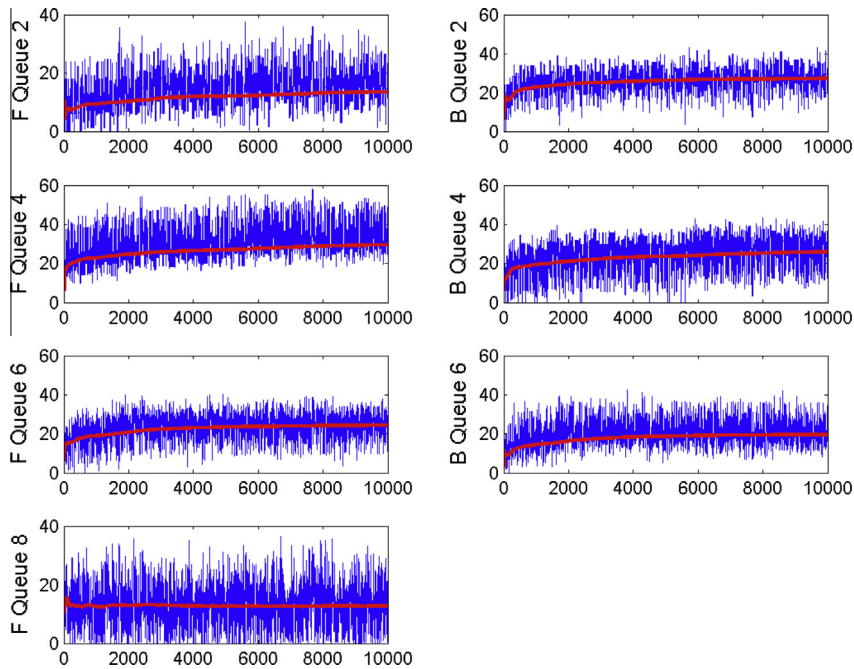
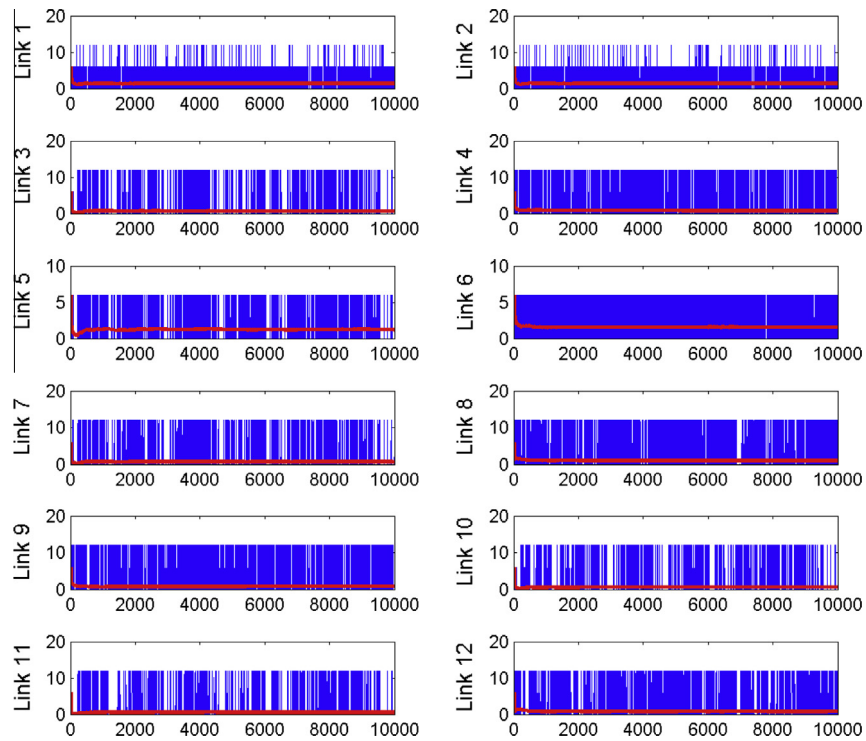
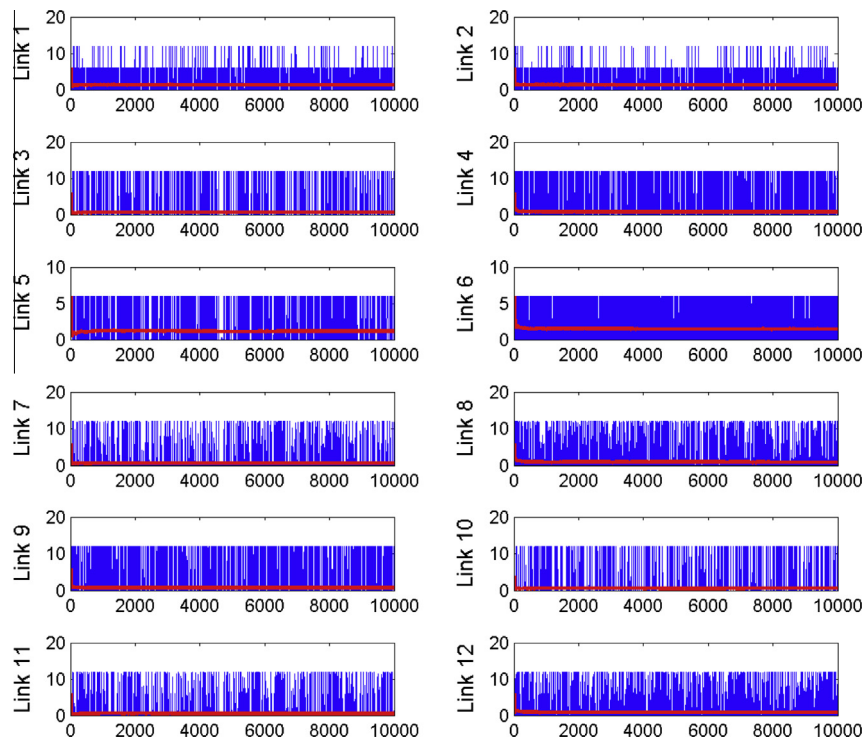


Fig. 7. Queues levels; Branch 2 for $\delta = 0.9$.

Finally, it can be noticed that the queue fluctuations increase for higher values of the parameter δ (Fig. 4). Recall that setting δ large implies focusing on maximizing the profit (and getting arbitrarily close to the optimal solution), but at the cost of increased product congestion in the queues.

Fig. 8. Links rates for $\delta = 0.1$.Fig. 9. Links rates for $\delta = 0.9$.

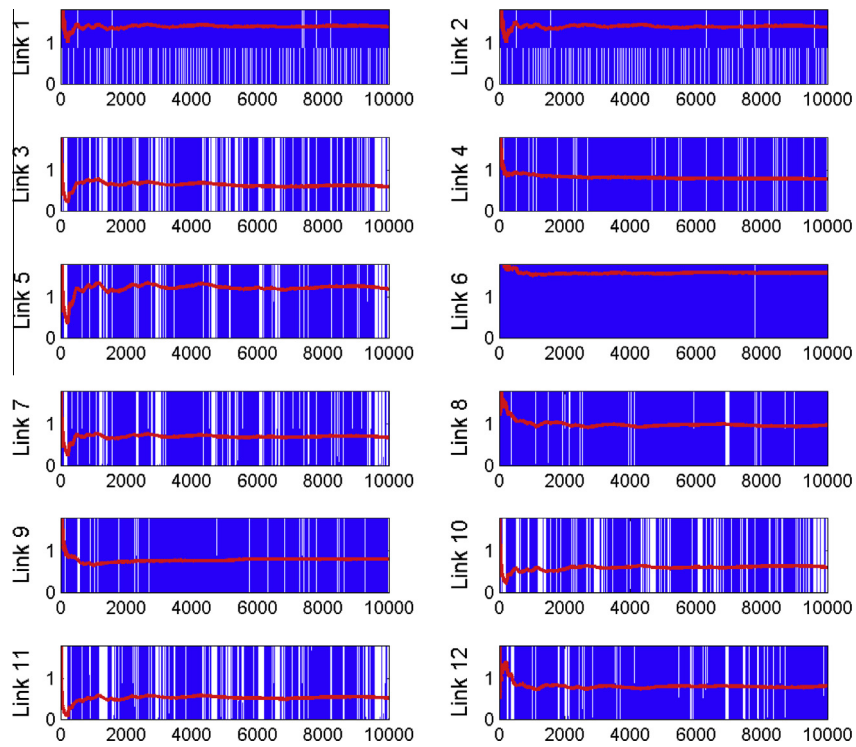


Fig. 10. Links rates for $\delta = 0.1$ (zooming).

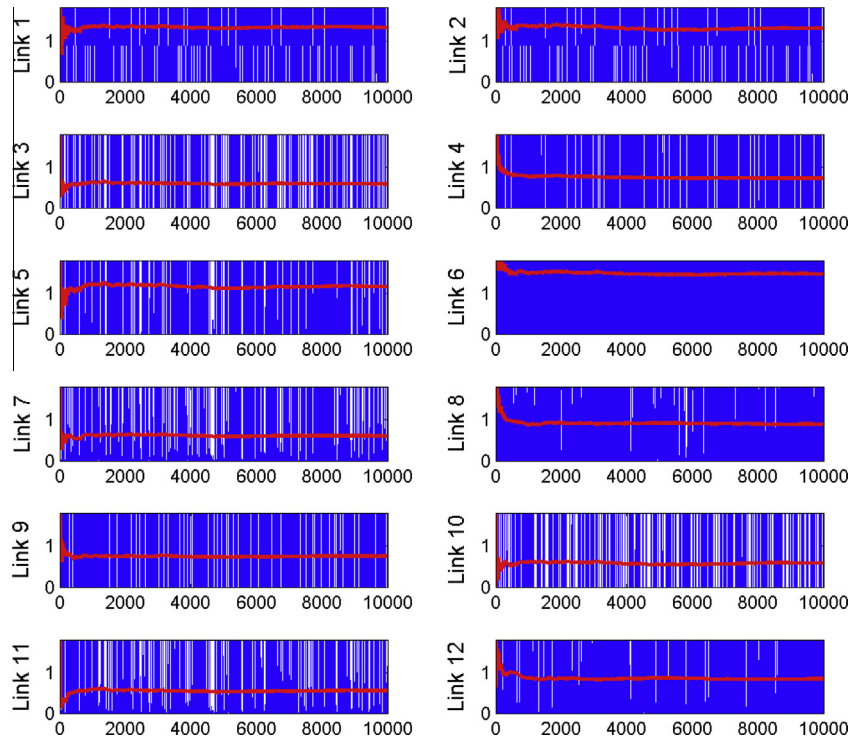


Fig. 11. Links rates for $\delta = 0.9$ (zooming).

6.2. Discussion: link rates

The rates at the different links are shown in Figs. 8 and 9, with zoomed-in versions shown in Figs. 10 and 11. A certain number of observations can be made from these figures.

First, the rates are random due to the randomized control algorithm. However, for all runs of the simulation, the average rate converges for each link. Furthermore, at each retailer, the value to which the average aggregate rate converges is less than 1.5, the average demand at each market. This is a necessary condition for the stability of the queues as was stated in Proposition 4.1. The average rate at the other links are such that the conservation of flow principle is satisfied at each node (which is what was expected).

When there are two links departing from a node, traffic can either be split (when both links are up), or entirely sent over one link (especially when the other link is down). To see which choice will be made at a given node, one can analyze the cost function $g_{ij}(\mu_{ij}) = a\mu_{ij}^2 + b\mu_{ij}$. Assume that at a branching node, traffic is split such that a rate of μ is sent over one link and $12 - \mu$ over the other link $0 \leq \mu \leq 12$. The (local) total cost of such routing is $a\mu^2 + b\mu + a(12 - \mu)^2 + b(12 - \mu) = a(2\mu^2 - 24\mu) + 12b + 144a$. Analyzing this cost as a function of μ , it can be observed that it is minimized when $\mu = 12$, implying that at a branching node, when both links are up, the entire traffic should be sent over one of the links. This is what is observed at nodes 2, 3, 6 and 7 for network in Fig. 3, where the traffic on the links departing from such nodes is (almost all the time) either 0 or equal to the maximum rate of 12.

7. Conclusions

In this paper the management of flow product in a supply chain was addressed. Generally speaking, the main contribution of the paper to the literature consists of the introduction of a *distributed algorithm for the flow management in a random and time-varying supply chain*, that is not based on stochastic approximation. In more detail, the contributions are as following. Motivated by recent events, a random and time-varying model for a supply chain was proposed which induced a stochastic nature of the flows. A stochastic optimization problem aimed at maximizing the profit function of a firm in terms of the time-averages of the flows and subject to constraints induced by the supply chain was formulated. A distributed, dynamic algorithm for solving the aforementioned optimization problem was proposed. Under this algorithm, at each time instant decisions are based only on the current state of the supply chain. In addition, decisions do not need information on the probability distribution of the supply chain. It was shown that the long-run, time-averages of the flows generated by the algorithm can get arbitrarily close to the optimal solution of the stochastic optimization problem.

Another, indirect contribution of the paper is that it exposes the reader to new techniques for solving stochastic optimization problems. This is beneficial to the operational research literature based in part on optimization theory.

Acknowledgements

The authors would like to express their gratitude to Allison Barnard Feeney, Mark Campanelli and Sharon J. Kemmerer for their valuable comments and suggestions. This material is based in part upon work supported by the NIST-ARRA Measurement Science and Engineering Fellowship Program award 70NANB10H026, through the University of Maryland, and in part upon work supported by the National Institute of Standards and Technology (NIST) Grant award 70NANB11H148 and by the National Science Foundation (NSF) Grant award CNS-1018346X.

References

- Aikens, C.H., 1985. Facility location models for distribution planning. *Eur. J. Oper. Res.* 22 (3), 263–279.
- Baghalian, Atefeh, Rezapour, Shabnam, Zanjirani Farahani, Reza, 2013. Robust supply chain network design with service level against disruptions and demand uncertainties: a real-life case. *Eur. J. Oper. Res.* 227 (1), 199–215.
- Behdani, B., July 2011. Risk Management and Paradoxical Situations in Modern Supply Chains. The CIP Report on Supply Chain.
- Blasgen, R., July 2011. Supply Chain Management: The Driving Force Behind the Global Economy. The CIP Report on Global Supply Chain.
- Canadian Competition Bureau, 2006. Competition Bureau Concludes Examination into Gasoline Price Spike Following Hurricane Katrina. <<http://www.competitionbureau.gc.ca>>.
- Chopra, S., Meindl, P., 2012. *Supply Chain Management*, fifth ed. Prentice Hall.
- Chou, M.C., Chua, G.A., Teo, C.P., Zheng, H., 2003. Process flexibility revisited: the graph expander and its applications. *Oper. Res.* 59 (5), 1090–1110.
- Dong, J., Zhang, D., Nagurney, A., 2004. Supply chain supernetworks with random demands. In: *Urban and Regional Transportation Modeling: Essays in Honor of David E. Boyce*, pp. 289–313.
- Georgiadis, L., Neely, M.J., Tassioulas, L., 2006. Resource allocation and cross layer control in wireless networks. *Found. Trends Network.* 1 (1), 1–144.
- Gupta, Anshuman, Maranas, Costas D., 2003. Managing demand uncertainty in supply chain planning. *Comput. Chem. Eng.* 27 (8), 1219–1227.
- Hishamuddin, H., Sarker, R.A., Essam, D., 2013. A recovery model for a two-echelon serial supply chain with consideration of transportation disruption. *Comput. Ind. Eng.* 64 (2), 552–561.
- Hsu, Chaug-Ing, Li, Hui-Chieh, 2011. Reliability evaluation and adjustment of supply chain network design with demand fluctuations. *Int. J. Prod. Econ.* 132 (1), 131–145.
- Kushner, H.J., 1967. *Stochastic Stability and Control*. Acad. Press.
- Lee, Hau L., Padmanabhan, V., Whang, Seungjin, 1997. The bullwhip effect in supply chains1. *Sloan Manage. Rev.* 38 (3), 93–102.
- Lewis, Brian M., Erera, Alan L., Nowak, Maciek A., White, Chelsea C., 2013. Managing inventory in global supply chains facing port-of-entry disruption risks. *Trans. Sci.* 47 (2), 162–180.

- Lim, Michael K., Bassamboo, Achal, Chopra, Sunil, Daskin, Mark S., 2013. Facility location decisions with random disruptions and imperfect estimation. *Manuf. Serv. Oper. Manage.* 15 (2), 239–249.
- Lin, Y.K., 2001. A simple algorithm for reliability evaluation of a stochastic-flow network with node failure. *Comput. Oper. Res.* 28 (13), 1277–1285.
- Nagarajan, M., Sodic, G., 2006. Game-theoretic analysis of cooperation among supply chain agents: review and extensions. *Eur. J. Oper. Res.*
- Nagurney, A., 2010. Supply chain network design under profit maximization and oligopolistic competition. *Transport. Res. E* (46), 281–294.
- Pontrandolfo, Pierpaolo, Gosavi, Abhijit, Geoffrey Okogbaa, O., Das, Tapas K., 2002. Global supply chain management: a reinforcement learning approach. *Int. J. Prod. Res.* 40 (6), 1299–1317.
- Qiang, Q., Nagurney, A., 2009. Modeling of supply chain risk under disruptions with performance measurement and robustness analysis. In: Wu, T., Blackhurst, J. (Eds.), *Managing Supply Chain Risk and Vulnerability: Tools and Methods for Supply Chain Decision Makers*. Springer, Berlin, Germany, pp. 91–111.
- Qi, Lian, Shen, Zuo-Jun Max, Snyder, Lawrence V., 2009. A continuous-review inventory model with disruptions at both supplier and retailer. *Prod. Oper. Manage.* 18 (5), 516–532.
- Samuelson, W.F., Marks, S.G., 2003. *Managerial Economics*, fourth ed. Wiley.
- Santoso, T., Ahmed, S., Goetschalckx, M., Shapiro, A., 2005. A stochastic programming approach for supply chain network design under uncertainty. *Eur. J. Oper. Res.* (167), 96–115.
- Skulte, R., Wikerson, T., July 2011. Critical Infrastructure and the Supply Chain. The CIP Report on Global Supply Chain.
- Snyder, Lawrence V., Atan, Zumbul., Peng, Peng., Rong, Ying., Schmitt, Amanda J., Sinsoysal, Burcu., 2012. OR/MS Models for Supply Chain Disruptions: A Review.
- Unnikrishnan, Avinash, Figliozzi, Miguel, 2011. Online freight network assignment model with transportation disruptions and recourse. *Transport. Res. Record: J. Transport. Res. Board* 2224 (1), 17–25.
- Varkony, I., July 2011. Critical Infrastructure Protection: Volatility and Risks in the Global Chain. The CIP Report on Global Supply Chain.
- Vidala, C.J., Goetschalck, M., 2001. A global supply chain model with transfer pricing and transportation cost allocation. *Eur. J. Oper. Res.* 129 (1), 134–158.
- Zhang, D., Dong, J., Nagurney, A., 2003. A supply chain network economy: Modeling and qualitative analysis. In: *Innovations in Financial and Economic Networks*.